

WO-6204SE



QUADBRID 4CH HD CCTV DVR

FEATURES

Free P2P Cloud EaZy Networking*

- ❖ Cloud EaZy Networking available to connect this device to Internet automatically in three steps with our free mobile app, EagleEyes.
- ❖ The “Buddy” feature to share the device access permission to other people.
- ❖ Device login / out notifications reported.




Remote Surveillance

- ❖ Fully compatible with iOS and Android devices, and Internet Explorer on Windows operating system
- ❖ CMS Lite for 32 devices central management
- ❖ Applicable also to Apple's media player, QuickTime.

Quadbrid Video Input

- ❖ Supports Analog HD / TVI / CVI / 960H video input

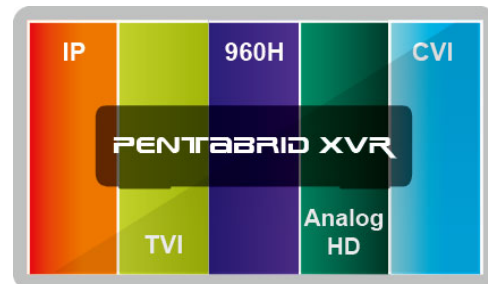


Push Status -

Active Event Notification with EagleEyes App

- ❖ Push Status to send instant notifications for system events, such as video loss or HDD data removal.



REAR PANEL

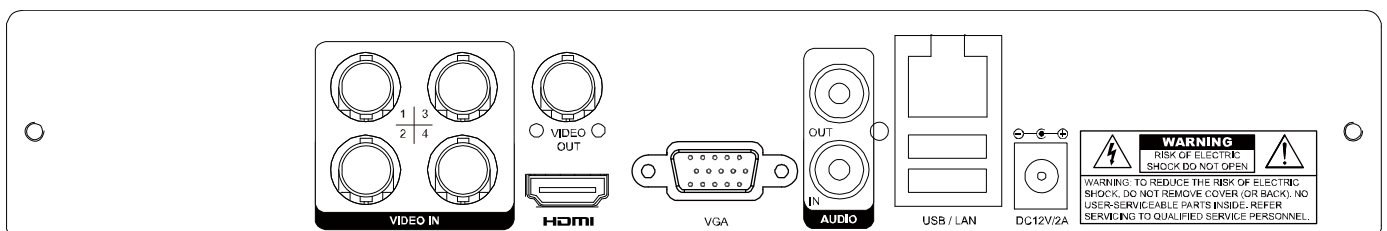

* EaZy Networking is a free P2P cloud service to connect WOSE devices to the Internet automatically by plug-and-play, enabling you to check the live view via your mobile device or laptop at anytime.

SPECIFICATIONS

▼ Video

Video System		NTSC / PAL (auto detection)
Video Compression Format		H.264
Video Signal		Analog HD / TVI / CVI / 960H
Video Input		4 channels (Composite video signal 1 Vp-p 75Ω BNC)
Video Output	BNC	YES (Main Monitor / Call Monitor selectable)
	VGA	YES
	HDMI	YES
Video Resolution		1080P / 720P / QHD / 960H / Frame / Field / CIF

▼ Record & Backup

Max. Recording Rate		1920 x 1080 @ 60 IPS <NTSC> / 50 IPS <PAL> 1280 x 720 @ 120 IPS <NTSC> / 100 IPS <PAL>
Recording Mode		Manual / Timer / Motion / Remote
Pre-alarm Recording		YES
Playback Channel		4CH
Quick Search		Time / Motion search mode
Backup Device		USB 2.0 drive / Network
Regular Backup		YES

▼ Audio

Audio Input		1 audio input
Audio Output		1 audio output (Mono)

▼ General

Hard Disk Storage		10TB SATA HDD x 1
SATA Interface		YES
Image Quality Setting		SUPER BEST / BEST / HIGH / NORMAL
USB Mouse Control		YES
Motion Detection Area		16 × 12 grids per channel
Motion Detection Sensitivity		3 adjustable parameters for accurate detection
Event Notification		Push Status / FTP / E-Mail
Picture Zoom		2X digital zoom
IR Remote Control		YES (IR receiver built-in)
Key Lock (Password Protection)		YES
User Level		4 user levels for different access privilege
Video Loss Detection		YES
Camera Title		Supports up to 25 letters
Video Adjustable		Hue / Saturation / Contrast / Brightness
Date Display Format		YY/MM/DD, DD/MM/YY & MM/DD/YY
Daylight Saving		YES
Power Source (±10%)		DC12V / 2A
Operating Temperature		10°C ~ 40°C (50°F ~ 104°F)
Operating Humidity		10% ~ 85%
Dimensions (±10%)**		260(L) x 48(H) x 235.7(D)
Net Weight (kg)		1.2

SPECIFICATIONS

▼ Network		
Ethernet	10/100 Base-T. Supports remote control and live view via Ethernet	
Network Protocol	TCP/IP, PPPOE, DHCP and DDNS	
▼ Remote Surveillance from PC		
Compatible Operating System	Windows & MAC	
Compatible Program	Web Browser:	Internet Explorer, Google Chrome & Safari
	CMS Lite:	32CH central management software for Windows OS
	QuickTime:	For both Windows and MAC operating systems
Max. online users	20	
Web Transmitting Compression Format	H.264	
Network Live Audio	YES	
Remote Independent Operation	YES	
Remote Event Download & Playback	YES	
▼ Mobile Surveillance		
App	EagleEyes	
Compatible Devices	iOS & Android devices	
Push Status	YES	
▼ Others		
EaZy Networking	YES	
DCCS Support	YES	
Free DDNS service	YES	
Privacy Mask	YES	
Multiplex Operation	Live display / record / playback / backup / network operations	
System Recovery	System auto recovery after power failure	
Optional Peripherals	HDMI Matrix (HDM02) / USB Joystick (AVX102)	

* The specifications are subject to change without notice.

** Dimensional tolerance: ±5mm